

Reactivated faulting near Cushing Oklahoma: increased potential for a triggered earthquake in an area of United States strategic infrastructure

Authors:

D.E. McNamara¹, G.P. Hayes¹, H.M. Benz¹, R.A. Williams¹, N.D. McMahon³, R.C. Aster³, A. Holland², T. Sickbert⁶, R. Herrmann⁴, R. Briggs¹, G. Smoczyk¹, E. Bergman⁵, P. Earle¹

Affiliations:

¹*US Geological Survey, MS966, Box 25046, Denver, CO 80225*

²*Oklahoma Geological Survey, 100 East Boyd Street, Suite N131, Norman, OK 73019*

³*Department of Geosciences, Colorado State University, Fort Collins, CO 80523*

⁴*Department of Earth and Atmospheric Sciences, 3642 Lindell Boulevard, Saint Louis University, St. Louis, MO 63108*

⁵*Global Seismological Services, 1900 19th Street, Golden, CO 80401*

⁶*Boone Pickens School of Geology, Oklahoma State University, Stillwater OK 74078.*

Manuscript in preparation for GRL, September 2015

This draft manuscript is distributed solely for purposes of scientific peer review. Its content is deliberative and predecisional, so it must not be disclosed or released by reviewers. Because the manuscript has not yet been approved for publication by the U.S. Geological Survey (USGS), it does not represent any official USGS finding or policy.

This article has been accepted for publication and undergone full peer review but has not been through the copyediting, typesetting, pagination and proofreading process which may lead to differences between this version and the Version of Record. Please cite this article as doi: 10.1002/2015GL064669

Key Points

Cushing Oklahoma seismicity has transferred stress to faults capable of larger earthquakes

A high degree of potential earthquake hazard exists for communities and energy industry infrastructure near Cushing Oklahoma

Analysis of the October 2014 Cushing sequence and its relationship to wastewater injection is important in order to understand potential hazard to critical infrastructure in the region.

Abstract

In October 2014 two moderate-sized earthquakes (M_w 4.0 and 4.3) struck south of Cushing, Oklahoma, below the largest crude oil storage facility in the world. Combined analysis of the spatial distribution of earthquakes and regional moment tensor (RMT) focal mechanisms indicate reactivation of a subsurface unnamed and unmapped left-lateral strike-slip fault. Coulomb failure stress change calculations (ΔCFS), using the relocated seismicity and slip distribution determined from regional moment tensors, demonstrate that the Wilzetta-Whitetail fault zone south of Cushing, Oklahoma, could produce a large, damaging earthquake comparable to the 2011 Prague event. Resultant severe shaking levels (MMI VII-VIII) in the epicentral region present the possibility of this potential earthquake causing damage to national strategic infrastructure and local communities.

Index Terms

7200 SEISMOLOGY, 7215 Earthquake source observations,

Key words

Oklahoma seismicity, injection-induced earthquakes, reactivated faulting

Introduction

Cushing Oklahoma is an area of concern because it is a major hub of the U.S. oil and gas pipeline transportation system that includes operational sections of the Keystone pipeline [DOT]. The earthquake sequence in October 2014 (Mw 4.0 and 4.3) reactivated a complex intersection of conjugate strike-slip structures within the Wilzetta-Whitetail fault zone, similar to the 2011 Prague, Oklahoma (Mw 5.6) earthquake sequence. To place constraints on the potential hazard of future earthquakes in the region, we examined the source characteristics of the October 2014 Cushing earthquake sequence and resultant Coulomb failure stress change (Δ CFS).

The October 2014 Cushing earthquake sequence was significant enough for the Oklahoma Corporation Commission (OCC) to temporarily close down several wastewater injection wells in the epicentral region. Minor damage was also reported throughout the City of Cushing including cracked plaster, broken window glass, and items thrown from shelves. The USGS Did You Feel It system reports that the Mw 4.3 was widely felt up to 210 km north in Wichita, KS, and 240 km east in Fayetteville, AR [USGS DYFI]. In November 2011, the same fault zone hosted a sequence of moderate-to-large, damaging earthquakes, near the town of Prague, which included the largest recorded earthquake in Oklahoma history (Mw 4.8, 5.6, 4.8) [McNamara *et al.*, 2015; Keranen *et al.*, 2013]. Based on previous studies linking hydraulic fracturing [Holland, 2013a] and wastewater disposal [Keranen *et al.*, 2014; Weingarten *et al.*, 2015; Walsh and Zoback, 2015] to increased seismicity in central Oklahoma, an assessment of the

changing earthquake hazard caused by the October 2014 Cushing sequence and its relationship to wastewater injection is important in order to understand potential damage to critical infrastructure in the region.

Identifying reactivated faults near Cushing Oklahoma

Fault length, orientation, and associated seismicity are key inputs to seismic hazard assessment. With this in mind, we examined the source characteristics of the October 2014 Cushing earthquake sequence. Using continuous data from portable seismic stations deployed in the vicinity of the epicenter (**Figure 1**) and template waveforms from the M 4.3 earthquake, we ran a subspace detection algorithm to identify subsequent aftershocks [after **Benz et al., 2015**] (**Figure 2**). Eighty well-recorded earthquakes were located using the Hypocentroidal Decomposition (HD) multiple-event method [**Jordan and Sverdrup, 1981**] (**Table S1**). Earthquakes within the Cushing sequence are relatively shallow (<6 km) and align along an approximately 5 km long N80W striking fault within the overlying Cambro-Ordovician Arbuckle group and the crystalline basement (**See electronic supplement for additional detail**).

Combined analysis of the spatial distribution of earthquakes and regional moment tensor (RMT) focal mechanisms indicate reactivation of a subsurface unnamed and unmapped left-lateral strike-slip fault (striking N80W) (herein called the Cushing fault) that is conjugate to the main branch of the Wilzetta-Whitetail fault zone and has no known historical seismicity [**Northcutt and Campbell, 1995; McBee, 2003; Bennison, 1964; Joseph, 1987**] (**Figures 1 and 3**). Δ CFS calculations for the Cushing sequence [following **Stein et al., 1997; Stein 1999**] indicate that the Wilzetta-Whitetail fault zone has, as a result of the recent earthquake sequence, experienced positive static stress changes (> 0.1 bar) over a length of at least 8 km south of Cushing (**Figures 1 and S2**). In addition, increased static stress is modeled on the vertically dipping Cushing fault beyond the ends of the recent earthquakes, and within the shallow basement above the

current sequence, over a total length of about 10 km (**Figures 1 and S2**). Scaling relations suggest that a rupture area of the dimensions that have experienced increased static stress could host earthquakes as large as the 2011 Prague earthquake (Mw 5.6) [**Wells and Coppersmith, 1994**].

If the Wilzetta-Whitetail fault zone were to rupture beyond the region of increased stress into the active structures extending south of Cushing, the possibility of a significantly larger and damaging earthquake exists (**Figure S3**). Conjugate strike-slip fault systems are common in tectonically active regions such as the western US and have caused large and damaging earthquakes in the recent past. For example, the compound November 1987 Elmore Ranch-Superstition Hills earthquake sequence in southern California demonstrated that rupture on a conjugate strike-slip “cross-fault” is capable of triggering rupture on a main fault [**Hudnut, 1989**]. Intraplate regions such as the seismogenic parts of Oklahoma are hypothesized to be in a constant state of failure equilibrium because ductile creep in the lower crust and upper mantle concentrates stress in the upper crust, loading optimally oriented faults to the point of failure [**Zoback and Townsend, 1991; Zoback and Zoback, 1991; Alt and Zoback, 2014; Holland, 2013a**]. Positive Δ CFS magnitudes of as little as 0.1 bars (0.01 MPa) have been shown to be sufficient to encourage the occurrence of future earthquakes in regions where faults are critically stressed and close to failure [**Stein, 1999**], as is thought to be the case in much of Oklahoma [**Sumy et al., 2014**].

In addition to positive Δ CFS increases along the Cushing and Wilzetta-Whitetail fault zones, continued injection of fluids into the fault zone can increase pore pressure and weaken elements of the fault system, potentially leading to rupture [**Healy et al., 1968; Talwani et al., 2007**]. For example, **Keranen et al., [2014]** demonstrated with hydraulic diffusivity modeling that small pore pressure perturbations (\sim 0.07 MPa) are sufficient to trigger earthquakes in the Jones Oklahoma region at distances of 10–20 km from high-

volume injection wells. Hydraulic fracturing operations used in enhanced oil and gas extraction have also been linked to earthquakes in central Oklahoma [**Holland, 2013b**]

Shortly after the 7 October 2014 Cushing Mw 4.0 event, the Oklahoma Corporation Commission (OCC) halted injection operations at three wells (**Figure 1**) within a six-mile radius around the mainshock epicenter. Inspectors found that the Wildhorse wastewater disposal well was injecting into the basement, below the disposal formation (Arbuckle), which, because of the likely presence of subsurface faults, can greatly increase the potential for inducing earthquakes [**Zoback, 2012; Ellsworth, 2013**]. The Wildhorse disposal well was ordered by the OCC to halt operations and plug back with cement back up to the depth of the Arbuckle group. Two additional wells in the vicinity (Calyx, Wilson) also experienced short periods of halted operations following the largest earthquakes in the Cushing sequence. All three wells were allowed to resume operations within a few days. The intervals of injection shutdown (10/7 and 10/22) followed by resumption of operations (10/20 and 10/27) correlate with variations in the daily microseismicity rate with a 17-day time lag (**Figure S4**). Hydraulic diffusivity rates required for the distribution of earthquakes and wells in the Cushing region are consistent with a 17-day lag time and with previous studies in Oklahoma and the central US [**Talwani et al., 2007; Holland, 2013b; Keranen et al., 2013; Keranen et al., 2014; Kim, 2013; Horton, 2012; Block et al., 2014**]. Preliminary observations and hydraulic diffusivity modeling, lead us to suspect that injected wastewater volume contributes to the modulation of seismicity rate in the Cushing earthquake sequence (**see electronic supplement for additional detail**).

Implications for earthquake hazard

Earthquakes within the Cushing sequence are of particular interest because of their proximity to critical energy industry infrastructure. Based on results from this study and observed shaking during the 2011 Prague M5.6, the Department of Homeland Security (DHS), whose responsibility it is to monitor critical national strategic infrastructure, recognized the hazard posed to the Cushing oil storage facility. For this reason, the newly identified Cushing fault was used by the DHS to compute a USGS PAGER/ShakeMap scenario for emergency response planning purposes at the Cushing storage facility. Assuming a moderate magnitude, similar to the 2011 Prague earthquake (Mw 5.7), the USGS PAGER scenario models maximum shaking of MMI VII that could seriously damage storage tanks and pipelines in the Cushing facility [Leith, *et al.*, 2015].

The USGS PAGER model modeled that an area of approximately 65 km² in the immediate vicinity of the 2011 Prague Mw 5.6 epicenter experienced severe shaking of intensity levels (MMI VIII = 34-65% g) [USGS PAGER]. It is interesting to note that the felt shaking intensity in the Prague epicentral region was significantly stronger than predicted for central Oklahoma in the USGS National Seismic Hazard Model (NSHM) (2% probability of exceedance in 50 years = 6-10% g) [Petersen *et al.*, 2014]. In the 2014 NSHM, all earthquakes in central Oklahoma were considered induced and were not included in the hazard calculations. As a consequence, shaking potential is underestimated in central Oklahoma. If policy changes and induced earthquakes are included in the NSHM or if the increased seismicity in Oklahoma over the past several years is a natural process, instead of induced by wastewater injection, maximum shaking levels in the NSHM will significantly increase. As a model sensitivity experiment, Petersen *et al.*, [2015] included all of the increased seismicity in Oklahoma, including relocated calibrated hypocenters from McNamara *et al.*, 2015 and this study in a 1-year NSHM. Inclusion of all recent Oklahoma earthquakes in the NSHM significantly increases ground shaking estimates and earthquake hazard (0.04% probability of

exceedance in 1 year = 50-200% g = MMI X+), which has serious implications for infrastructure design standards.

Conclusions

Based on stress changes due to the 2014 Cushing sequence, and continued wastewater injection, it is reasonable to conclude that the Cushing and Wilzetta-Whitetail fault zones are critically stressed in a region sufficient enough to increase the likelihood of a large and damaging earthquake. Results from this study can be used as guidance to the recommendation [Zoback, 2012] that the energy industry should “avoid injection into active faults” and be prepared to distribute the volume across wells, and/or be prepared to abandon wells altogether in areas of unacceptable risk. The coupling of high-resolution seismicity methodologies with Coulomb stress analysis and with empirical and/or modeled seismicity response due to well-monitored injection volumes offers a path forward towards effective and economically valuable coupled operational earthquake forecasting and associated injection well management in regions of significant induced seismicity.

Acknowledgements

This research was supported by the United States Geological Survey’s National Earthquake Hazards Reduction Program. Source parameters determined in this study contribute to improving the understanding of earthquake hazard in Oklahoma and are available to research scientists and engineers from the USGS COMCAT system (<http://earthquake.usgs.gov/>). All waveform data used in this study, from both portable and permanent seismic stations, are archived and available for download from the IRIS Data Management Center (DMC). Earthquake hypocenter uncertainty was significantly reduced due to the high density of portable seismic stations. The RMTs benefited from

high-quality broadband data recorded at permanent stations in the ANSS RSNs, Backbone, and Earthscope TA seismic networks.

Software used in this study includes GMT and ArcMap to generate maps [Wessel and Smith, 2004], SAC for data analysis and time series plots [Goldstein and Snoke, 2005] and MAPSEIS/ZMAP for earthquake FMD and Omori's law calculations [Weimer, 2001]. All other analysis software was written by the authors.

The authors greatly appreciate the hard work of people that responded to the evolving Cushing earthquake sequence. USGS field crews included Jim Allen and Dave Worley. Thanks to Steve Ploetz and Dave Wilson (USGS) for additional seismograph installation. Tim Sickbert, Oklahoma State University staff who installed Netquakes systems at the Cushing airport and at one other location. Local hosts of portable seismograph are appreciated. We would also like to thank staff at IRIS PASSCAL and the Oklahoma Geological Survey for material and logistical support. The facilities of the IRIS Consortium are supported by the National Science Foundation under Cooperative Agreement EAR-1261681 and the DOE National Nuclear Security Administration. D. Ketchum provided easy access to waveform and meta-data. We thank the NEIC duty seismologists for single-event locations and phase picks. We thank N. Vance and J. McCarthy and E. Myers for editorial reviews. We thank Esri, i-cubed, and GeoEye for the basemap imagery, and the Oklahoma Corporation Commission for their help in obtaining well information and input to this effort. R. Gold provided valuable comments.

References

- Alt, R., and M. Zoback, (2014), Development of a detailed stress map of Oklahoma for avoidance of potentially active faults when siting wastewater injection wells, Fall 2014 AGU abstract.
- Benz, H., N. McMahon, R. Aster, D.E. McNamara and D. Harris, (2015), Hundreds of Earthquakes per Day: The 2014 Guthrie, Oklahoma earthquake sequence, *Seism. Res. Lett.*, in press.
- Bennison, A., (1964), The Cushing Field Creek County, Oklahoma, *Tulsa Geological Society Digest*, 32, 158-159.
- Block, L.V., C.K. Wood, W.L. Yeck and V.M. King, (2014), The 24 January 2013 ML 4.4 Earthquake near Paradox, Colorado, and its relation to deep well injection, *Seism. Res Lett.*, 85, 609-624.
- Leith, W., D. Wald, D.E. McNamara, R. Williams and V. Quitarano, (2015). An Earthquake Scenario for Cushing, Oklahoma , USGS-OR, in prep.
- DOT: <https://www.npms.phmsa.dot.gov/>
- Ellsworth, W.L., (2013). Injection-induced earthquakes, *Science*, 341, 142-149.
- Goldstein, P., and A. Snoke, (2005), SAC availability for the IRIS community, *DMS Electronic Newsletter*, 7, no.1.
- Healy, J. T., W. W. Rubey, D. T. Griggs, and C. B. Raleigh (1968), The Denver earthquakes. *Science* 161, 1,301–1,310.
- Holland, A. A. (2013a). Optimal fault orientations within Oklahoma, *Seism. Res. Lett.*, 84, 876-890.

- Holland, A. A. (2013b), Earthquake triggered by hydraulic fracturing in south-central Oklahoma, *Bull. Seism. Soc., Am.* 103, 1784-1792.
- Horton, S., (2012), Disposal of hydrofracking waste fluid by injection into subsurface aquifers triggers earthquake swarm in central Arkansas with potential for damaging earthquake, *Seism. Res. Lett.*, 83, 2, 250-260.
- Hudnut, K.W., L. Seeber, and J Pacheco, (1989). Cross-fault triggering in the November 1987 Superstition Hills earthquake sequence, Southern California, *Geophys. Res. Lett.*, 16, 199-202.
- Jordan, T.H. and K.A. Sverdrup (1981). Teleseismic location techniques and their application to earthquake clusters in the south-central Pacific, *Bull. Seism. Soc. Am.* 71, 1105-1130.
- Joseph, L., (1987), Subsurface Analysis, "Cherokee" Group (Des Moinesian), Portions of Lincoln, Pottawatomie, Seminole, and Okfuskee Counties, Oklahoma, Oklahoma City Geological Society Shale Shaker, December 1986/January 1987.
- Kim, W.-Y. (2013), Induced seismicity associated with fluid injection into a deep well in Youngstown, Ohio, *J. Geophys. Res. Solid Earth*, 118, 3506–3518, doi:10.1002/jgrb.50247.
- Keranen K.M., Savage H.M., Abers G.A. & Cochran E.S. (2013). "Potentially induced earthquakes in Oklahoma, USA: Links between wastewater injection and the 2011 Mw 5.7 earthquake sequence". *Geology*. doi:10.1130/G34045.1.
- Keranen, K.M., M. Weingarten, G.A. Abers, B.A. Bekins, and S. Ge (2014), Sharp increase in central Oklahoma seismicity since 2008 induced by massive wastewater injection, *Science*, 0.1126/science.1255802.
- McBee, W., (2003), Nemaha strike-slip fault zone, AAPG Mid-continent section meeting, October 13, 2003, 14p.
- McNamara, D.E., H. M. Benz, R. B. Herrmann, E.A. Bergman, P. Earle, A. Holland, R. Baldwin, and A. Gassner, (2015), Earthquake hypocenters and focal mechanisms in

central Oklahoma reveal a complex system of reactivated subsurface strike-slip faulting, *Geophys. Res. Lett.*, in press.

Northcutt, R. A., and J. A. Campbell (1995). Geological provinces of Oklahoma, Oklahoma Geol. Surv. Open-File Rept. OF5-95.

Petersen, Mark D., Charles S. Mueller, Morgan P. Moschetti, Susan Hoover, Justin L. Rubinstein, William L. Ellsworth, Austin Holland, John G. Anderson, Incorporating Induced Seismicity in the 2014 United States National Seismic Hazard Models: Workshop and Sensitivity studies, (2015). Documentation for the 2014 update of the United States national seismic hazard maps. U.S. Geological Survey Open-File Report, in review.

Petersen, Mark D.; Moschetti, Morgan P.; Powers, Peter M.; Mueller, Charles S.; Haller, Kathleen M.; Frankel, Arthur D.; Zeng, Yuehua; Rezaeian, Sanaz; Harmsen, Stephen C.; Boyd, Oliver S.; Field, Ned; Chen, Rui; Rukstales, Kenneth S.; Luco, Nico; Wheeler, Russell L.; Williams, Robert A.; Olsen, Anna H., (2014). Documentation for the 2014 update of the United States national seismic hazard maps. U.S. Geological Survey Open-File Report 2014-1091, xii, 243 p.

Stein, R. S., Barka, A. A. & Dieterich, J. H., (1997). Progressive failure on the North Anatolian fault since 1939 by earthquake stress triggering. *Geophys. J. Int.* 128, 594–604.

Stein, R. S. The role of stress transfer in earthquake occurrence, (1999), *Nature*, 402(6762), 605-609.

Sumy, D. F., E. S. Cochran, K. M. Keranen, M. Wei, and G. A. Abers (2014), Observations of static Coulomb stress triggering of the November 2011 *M*5.7 Oklahoma earthquake sequence, *J. Geophys. Res. Solid Earth*, 119, 1904–1923, doi:[10.1002/2013JB010612](https://doi.org/10.1002/2013JB010612).

Talwani, P., L. Chen, and K. Gahalaut (2007). Seismogenic permeability, k_s , *J. Geoph. Res.* 112, no. B7, doi: [10.1029/2006JB004665](https://doi.org/10.1029/2006JB004665).

USGS DYFI website: <http://earthquake.usgs.gov/earthquakes/dyfi/>

USGS PAGER website: <http://earthquake.usgs.gov/earthquakes/pager/>

Walsh, F. R., and M. D. Zoback (2015), Oklahoma's recent earthquakes and saltwater disposal., *Sci. Adv.*, 1, e1500195.

Weingarten, M., S. Ge, J.W. Godt, B. A. Bekins, J. L., Rubinstein (2015), High-rate injection is associated with the increase in U.S. mid-continent seismicity, *Science*, 348 no. 6241 pp. 1336-1340. DOI: 10.1126/science.aab1345

Wells, D.L. and Coppersmith, (1994), K.J. New empirical relationships among magnitude, rupture length, rupture width, rupture area, and surface displacement, *Bull. seism. Soc. Am.*, 84, 974–1002.

Wessel, P., and W.H.F. Smith, (2004), The Generic Mapping Tools (GMT) version 4 Technical Reference & Cookbook, SOEST/NOAA.

Wiemer, S. (2001), A software package to analyze seismicity: ZMAP, *Seism. Res. Lett.* 72, 373–382.

Zoback, M. D., and M. L. Zoback (1991). Tectonic stress field of North America and relative plate motions. In *Neotectonics of North America*, ed. D. B. Slemmons, E. R. Engdahl, M. D. Zoback, and M. D. Blackwell, 339–366. Denver, CO: Geological Society of America.

Zoback, M. D., and J. Townend (2001). Implications of hydrostatic pore pressures and high crustal strength for the deformation of intra- plate lithosphere. *Tectonophysics* 336, 19–30.

Zoback, M.D., (2012), Managing the seismic risk posed by wastewater disposal. *Earth Magazine* 57, 38–43.

Accepted Article

Figures

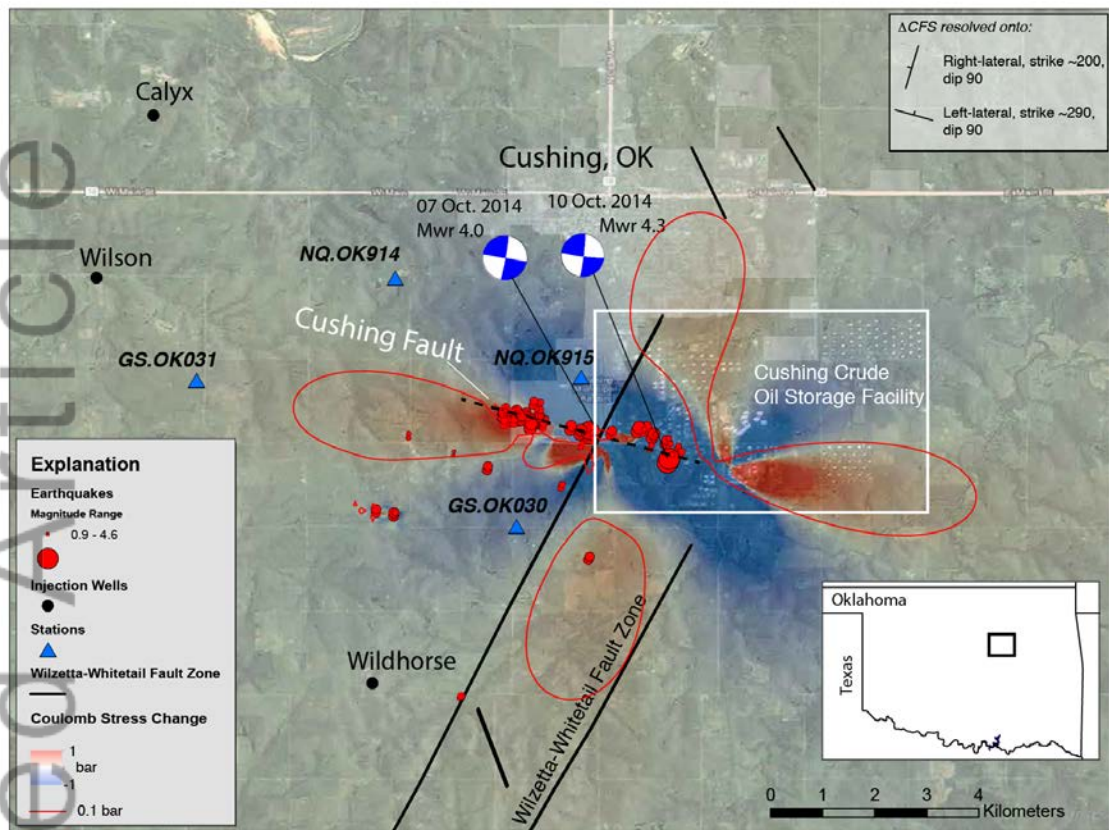


Figure 1: Map of the Cushing Oklahoma region with earthquakes (red circles) seismic stations (blue triangles) and Coulomb failure stress (ΔCFS) model. Strands of Wilzetta-Whitehorse fault zone are shown as black lines. Dashed lines show the conjugate Cushing fault inferred from the spatial distribution of seismicity.

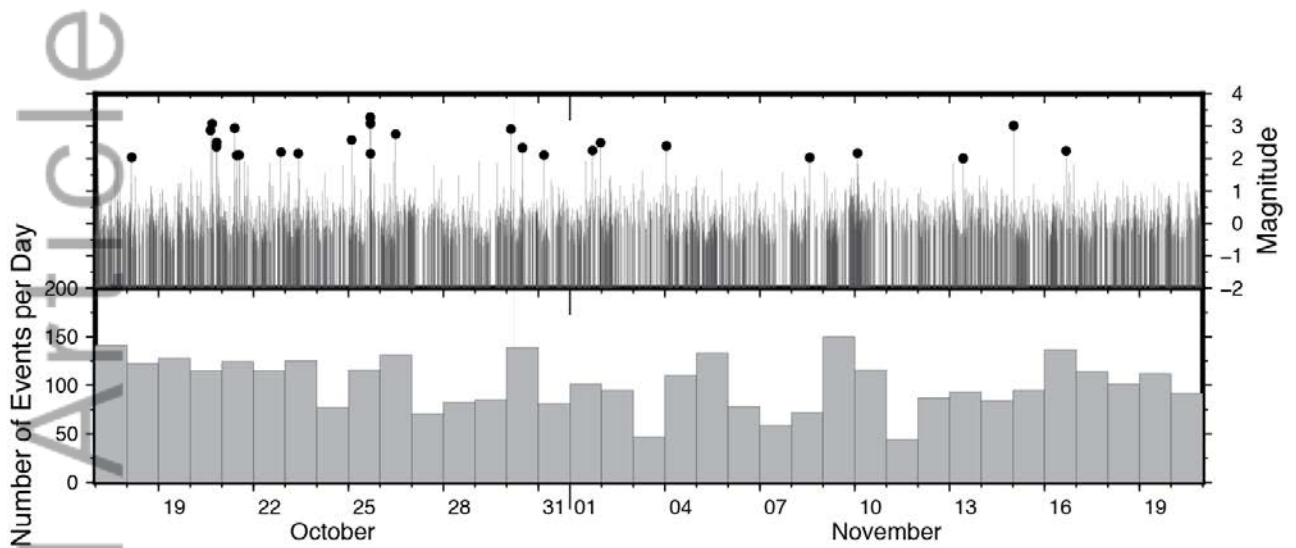


Figure 2: Subspace earthquake detection summary as a function of time for station GS.OK031. The top panel shows the detection magnitudes with earthquakes ($M > 2$) large enough to be detected at multiple seismic stations shown as black circles. The bottom panel shows the number of all detections per day that exceed a 6-sigma threshold above background moving correlation values.

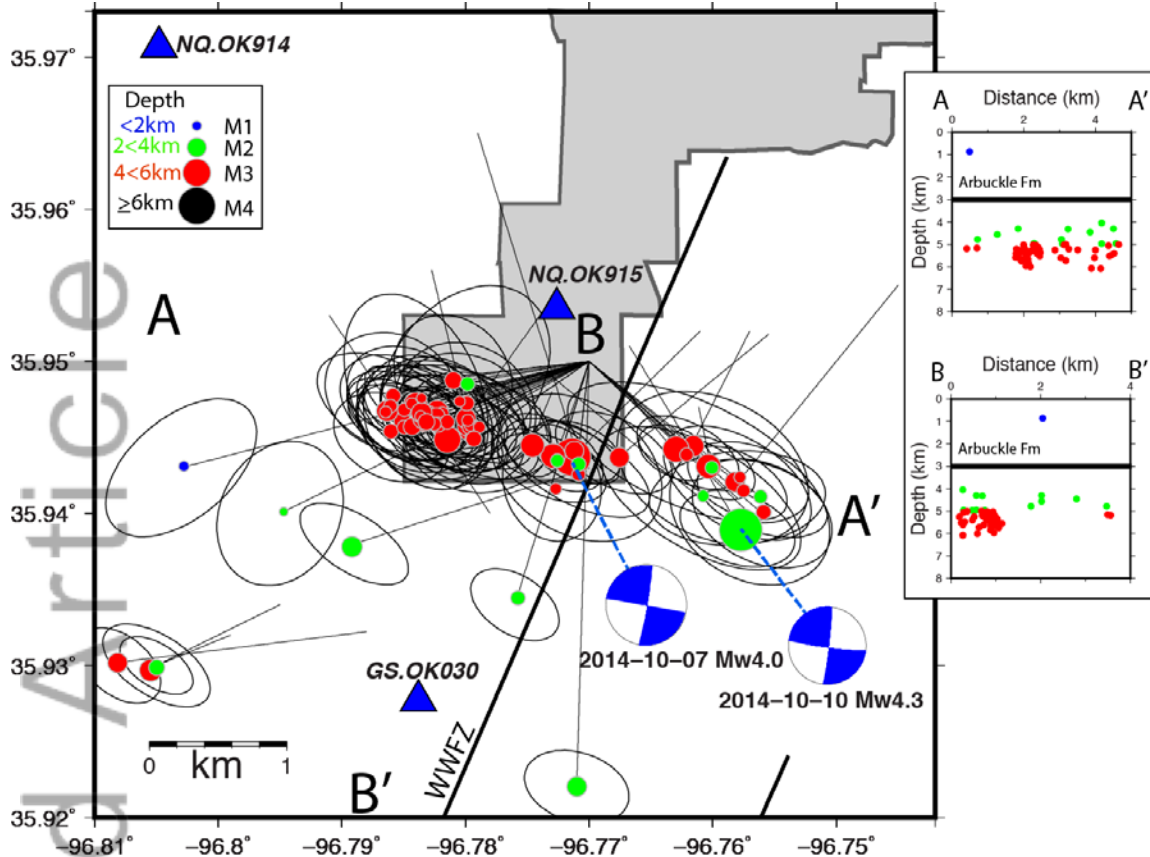


Figure 3: Cushing Oklahoma Hypocentroidal Decomposition (HD) re-located epicenters and Mw 4.0 and Mw 4.3 left-lateral strike-slip focal mechanisms. Grey region outlines the Cushing city boundary. Circles show the HD re-located hypocenters scaled by magnitude and colored by depth. Blue triangles show the locations of seismic stations used in this study. Thick black lines are subsurface and surface faults of the right-lateral Wilzetta-Whitetail fault (WWFZ). HD uncertainty ellipses and relocation vectors are shown as thin black lines. Relocation vectors for larger magnitude earthquakes originate at the USGS NEIC single-event epicenter or, for smaller magnitude earthquakes, at the starting location determined for all subspace detections. Regional-moment tensors are displayed as blue focal mechanisms. (top inset) Depth profile along strike of the inferred Cushing fault (A-A'). (bottom inset) Depth profile perpendicular to strike of the Cushing fault (B-B').